

2018 ~ EDITION

**SYMBOSA GRANITO  
PRIVATE LIMITED**


📍 BA, National Highway, Matel Road,  
AT, Matel, Wankaner. 363 622,  
Gujarat, INDIA

☎ +91 98 258 24 365  
✉ [info@symbosagranito.com](mailto:info@symbosagranito.com)  
🌐 [www.symbosagranito.com](http://www.symbosagranito.com)

ADVEK +91 90333 39320



**SYMBOSA®**

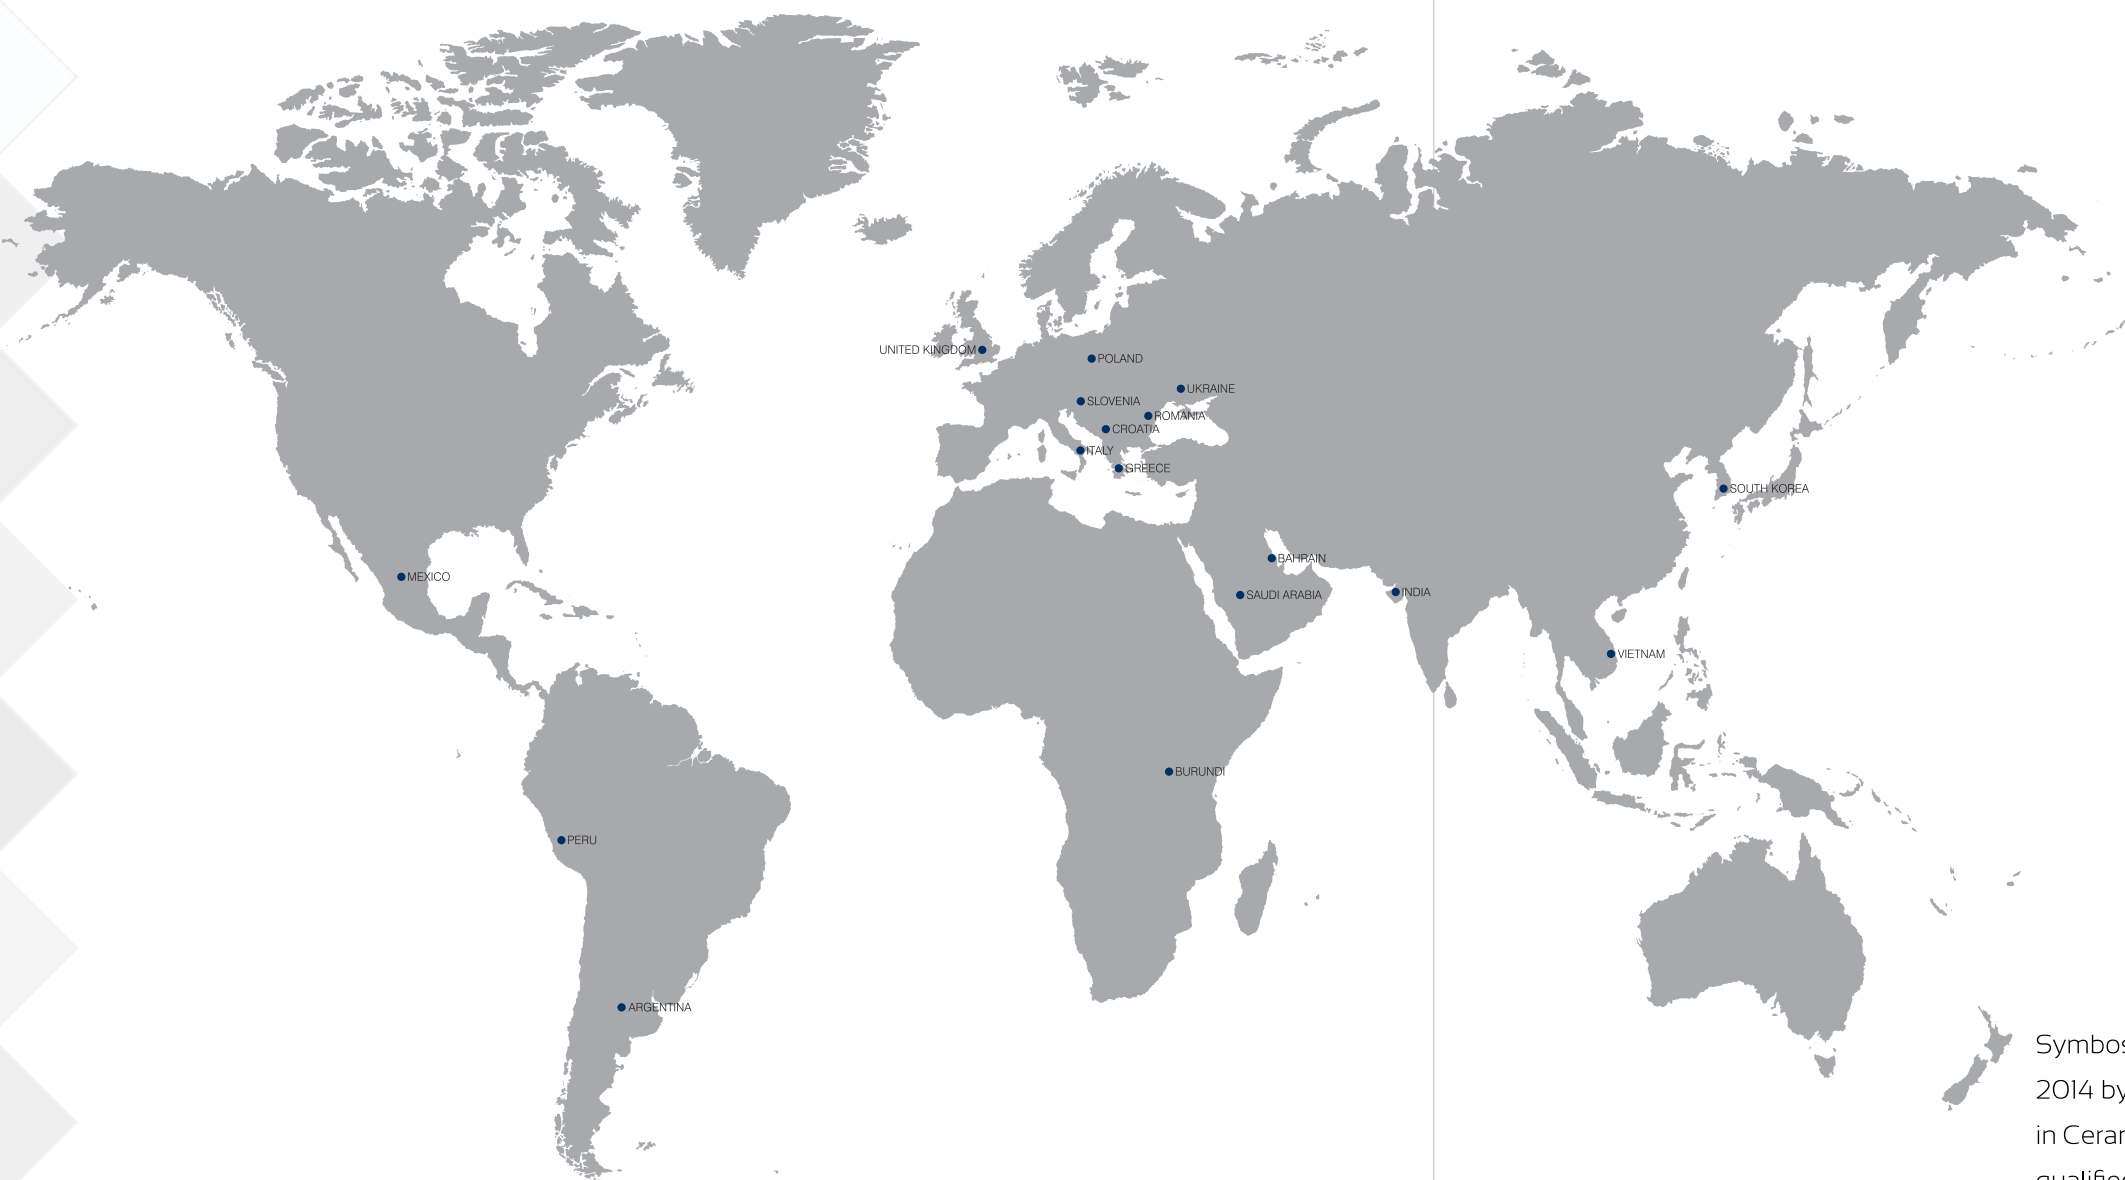

**GLOBAL  
PRESENCE**

### **The Company**

Symbosa Granito Private Limited is a Private incorporated on 08 December 2014 by a group of entrepreneurs having vivid experience and wide exposure in Ceramics. People involved here are young qualified business graduates and qualified ceramic engineers with core experience in the same field.

The resource personnel working in the company have been consistently providing reliable support with state of the art infrastructure for manufacturing desired quality for Full Body & Soluble Salt tiles. Bottom line of the company philosophy is building a long-term business partnership with its clients where interpersonal relationship, reliability, assured quality and target oriented modern technology are the major building blocks.

We keep manufacturing our products as per new trends and diversified with innovative designing to satisfied market demand time to time. Our tiles have been used in many commercial, hospitality, retail and residential projects across India and overseas.

We want to establish ourselves as the best choice in Ceramic Tiles offering the full spectrum of vitrified tiles. Symbosa is focusing exclusively in high quality and cost-effective production of vitrified tiles.



SYMBOSA



Floor Tile



Water Resistance



Indoor Use



Stain Resistance

600x  
600MM

NANO  
SOLUBLE  
SALT


FULL  
BODY  
RECTIFIED




8001



8002

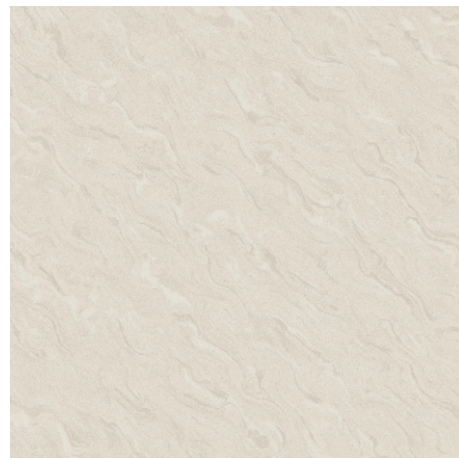

8003

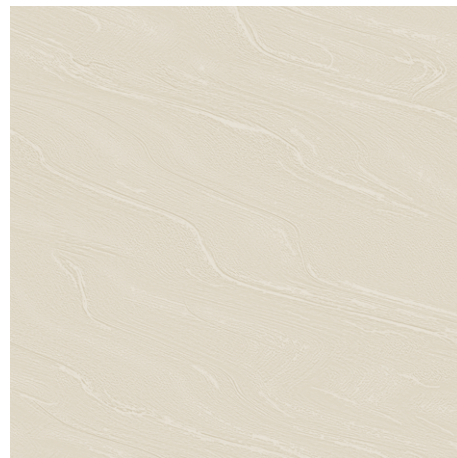

8005



8006



8007



8008



8009





SYMBOSA



Floor Tile



Water Resistance



Indoor Use




Stain Resistance


600x  
600MM

NANO  
SOLUBLE  
SALT

FULL  
BODY  
RECTIFIED

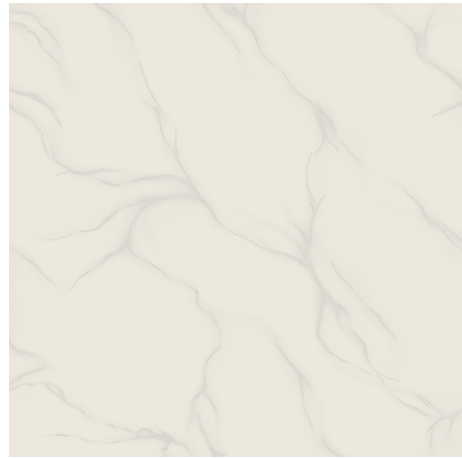

8010

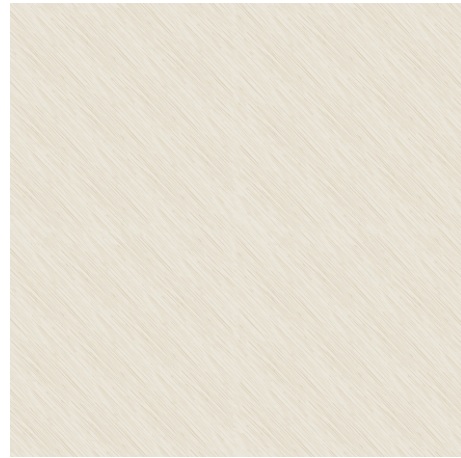

8012



8013



8014




8016



8018



8019

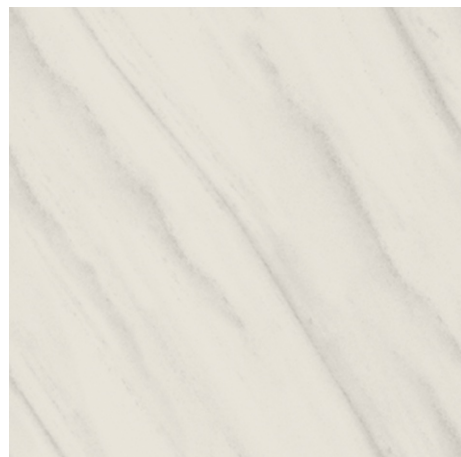

8024





SYMBOSA




8029



8032



8034

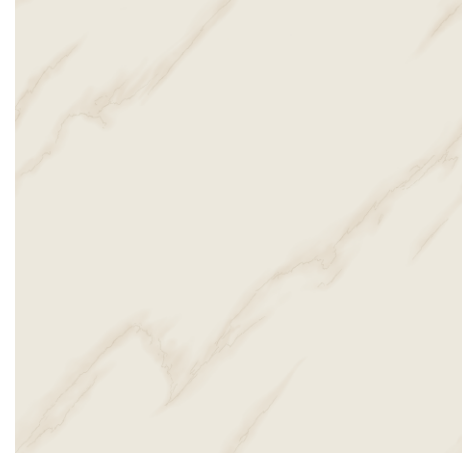

8037



8046



8047



Floor Tile



Water Resistance



Indoor Use



Stain Resistance


600x  
600MM

NANO  
SOLUBLE  
SALT


FULL  
BODY  
RECTIFIED







Floor Tile



Water Resistance



Indoor Use




Stain Resistance


600x  
600MM

NANO  
SOLUBLE  
SALT


FULL  
BODY  
RECTIFIED



IVORY



IVORY MATT

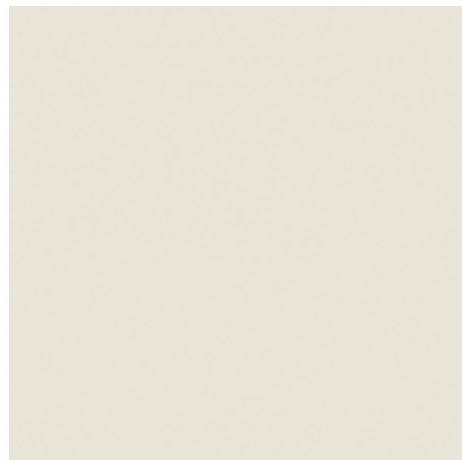


IVORY PLUS




ROYAL GREY



ROYAL GREY MATT



ITALIAN WHITE



ITALIAN WHITE MATT

### TECHNICAL SPECIFICATION

| NO. | PROPERTY                                 | INTERNATIONAL Std.<br>ISO 3006/EN 176<br>Group Bla | SYMBOSA                   | METHOD OF<br>TESTING |
|-----|--|--|---------------------------|----------------------|
| 1   | Deviation in Length                      | ±0.5 %   | ±0.1 %                    | EN 98                |
| 2   | Deviation in Thickness                   | ±0.5 %   | ±0.1 %                    | EN 98                |
| 3   | Straightness of Sides                    | ±0.5 %   | ±0.1 %                    | EN 98                |
| 4   | Rectangularity                           | ±0.5 %   | ±0.2 %                    | EN 98                |
| 5   | Surface Flatness                         | ±0.5 %   | ±0.2 %                    | EN 98                |
| 6   | Water Absorption*                        | > 0.5%   | > 0.03%                   | EN 99                |
| 7   | Mohs Hardness*                           | > 6  | > 8                       | EN 101               |
| 8   | Flexural Straightness                    | > 27 N/mm <sup>2</sup>                             | > 47 N/mm <sup>2</sup>    | EN 100               |
| 9   | Abrasion Resistance                      | < 204 mm <sup>3</sup>                              | < 144 mm <sup>3</sup>     | EN 102               |
| 10  | Skid Resistance ( Friction Coefficient ) | < 0.4  | < 0.6                     | ASTM C-1028          |
| 11  | Breaking Strength*                       | 1113 N   | 2830 N                    | ASTM C-648           |
| 12  | Density (g/cc)                           | > 2  | 2.4                       | DIN 51082            |
| 13  | Frost Resistance                         | Frost Proof  | Frost Proof               | EN 202               |
| 14  | Chemical Resistance                      | No. Damage   | No. Damage                | EN 106               |
| 15  | Thermal Shock Resistance                 | No. Damage   | No. Damage                | EN 104               |
| 16  | Color Resistance                         | No. Damage   | No. Damage                | DIN 51094            |
| 17  | Stain Resistance                         | Resistance   | Resistance                | ISO 10545-14         |
| 18  | Moisture Resistance                      | Nil  | Nil                       | ISO 10545-10         |
| 19  | Glossiness                               | ----   | Min 65%-70%<br>Reflection | Glossmeter           |

### PACKING DETAILS

| SIZE         | NO. OF TILES PER BOX | COVERAGE AREA |
|--------------|----------------------|---------------|
| 600 X 600 MM | 4 PCS. / BOX         | 1.44 Sq. Mtr. |

### APPLICATION



Airport



Gymnasium



Home



Hospital



Super Market



Multiplex



Hotel



School



Religion Place



Bank



Dance Mall



Industry